

TEMPMATE.®-S1 V2



Temperature




Single Use



PDF

WE LOVE TO HEAR FROM YOU

TEMPMATE.®-S1 V2

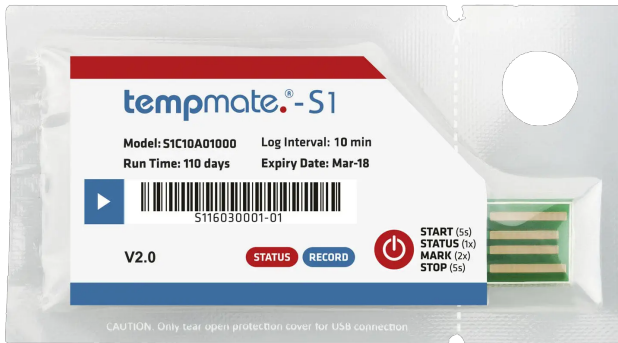

Your benefits at a glance:

- Cost-effective and reliable
- Smart Design, intuitive operation
- Waterproof and food grade packing
- No additional hardware or software required
- Detailed PDF and CSV report including graph and table
- Intelligent LEDs for status monitoring
- Extended shelf-life of 2 years
- Reprogrammable

Main Features	
USAGE TYPE	Single use
PROTECTION CLASS	IP67/NEMA6
TEMPERATURE UNIT	°C / °F
TEMPERATURE RANGE	30°C 70°C (86°F 158°F)
ACCURACY	+/-0.5°C 20°C/40°C +/-1°C (other)
RESOLUTION	0.1°C
TIME REFERENCE	UTC+00 (UTC = GMT)
STORAGE CAPACITY	16.000 measurements
RECORDING INTERVAL	10 min standard, other settings on request
RUN TIME/SAMPLING DURATION	Up to 110 days, other settings on request
SHELF LIFE	2 year / CR2450 button cell
START/STOP MODE	Button, software or stop when full
SOFTWARE	PDF or CSV Reader / tempbase.® optional
REPORTING	Automatic PDF & CSV report
COMPUTER INTERFACE	USB 2.0
SIZE / WEIGHT	83 x 47 x 7 mm (L x W x H) 14.6g
CERTIFICATIONS	EN12830, CE, RoHS
VALIDATION RATIONALE	Hardcopy and PDF file in memory
ACCESSORIES INCL.	Shipping Documents, Certificate, Reprogram Label and Seal-Bag
CONNECTION INTERFACE	USB 2.0, A-Type
ALARM CONFIGURATION	Optional, up to 5 points
REPROGRAMMABLE	Yes, with free tempbase.® software